

SPC FLOOR PANELS

STONE / POLYMER / COMPOSITE


TECHNICAL CARD

30 YEARS
GUARANTEE
RESIDENTIAL

CLICK SYSTEM
CLICK Fold Down



-  Easy installation
-  Fire resistant
-  Suitable for floor heating
-  Waterproof
-  Abrasion resistant
-  Soundproof against footsteps
-  Warm surface

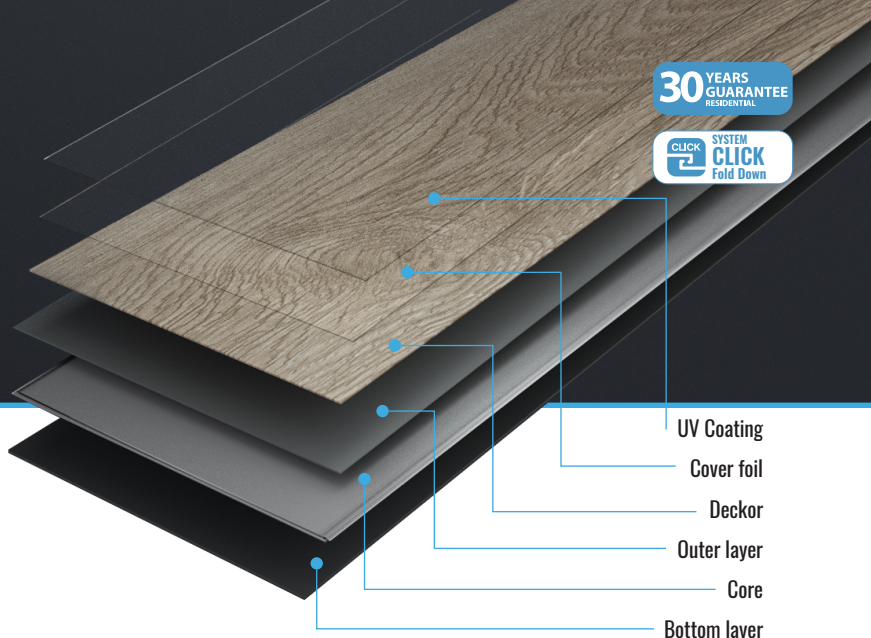

PRODUCT INFORMATION:

	WOOD Collection	PRESTIGE Collection	STONE Collection
Floortype	floating floor	floating floor	floating floor
Material	mineral - polymer composite	mineral - polymer composite	mineral - polymer composite
Dimensions	179 mm x 1220 mm	226 mm x 1220 mm	465 mm x 930 mm
Panel thickness	4,5 mm	4,7 mm	5 mm
Protective layer thickness	0,35 mm	0,55 mm	0,55 mm
Packaging	8 pcs (1,74 m ² /15,2 kg)	7 pcs (1,93 m ² /18,5 kg)	4 pcs (1,73 m ² /16 kg)
Warranty (domestic use)	30 years	30 years	30 years
Warranty (public use)	5 years	5 years	5 years
Assembly system	I4F 3L click	I4F 3L click	I4F 3L click
Abrasion class (domestic use)	23	23	23
Abrasion class (commercial use)	34	34	34
Dilatation	<100 m ²	<100 m ²	<100 m ²
Underfloor heating	yes / max 27°C	yes / max 27°C	yes / max 27°C

 We recommend underlay used with SALAG Floor panels to be maximum 2 mm thick.

TECHNICAL DATA:

	Flame retardancy classification	EN 13501-1	B _{fl} -s1
	Slip resistance	EN 13893	DS
	Antistatic feature	EN 1815	≤2 kV
	Chair wheel influence	PN-EN 425	0,02 mm
	Ultraviolet rays endurance	EN ISO 105-B2	> 6
	Chemical endurance	EN ISO 26987	Immune
	Impact sound reduction	EN ISO 717-2	ΔLw = 20dB
	Residual indentation	EN ISO 24343-1	max 0,01 mm
	Heat conduction	EN 12667	0,37 W/mK
	Thermal resistance	EN 12667	0,07 m ² K/W
	Formaldehyde content	PN-EN 717-1	–